


Agilent N8972A, N8973A, N8974A, N8975A NFA Series Noise Figure Analyzers

Data Sheet

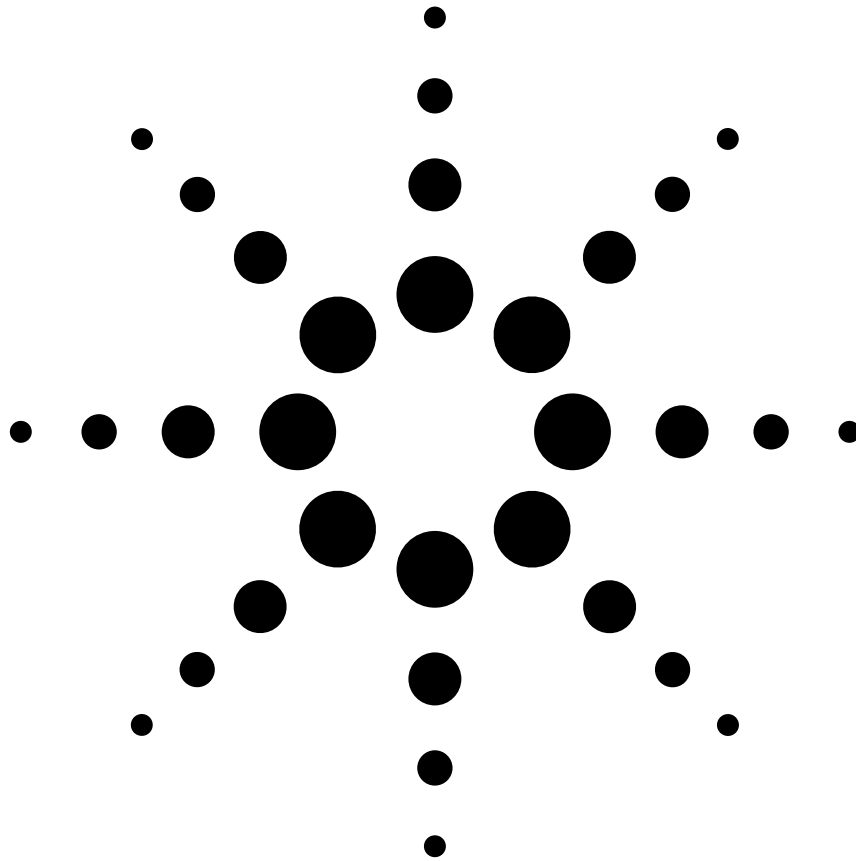

Agilent Technologies

Specifications

Specifications are only valid for the stated operating frequency, and apply over 0° C to +55° C unless otherwise noted. The analyzer will meet its specifications after 2 hours of storage within the operating temperature range, 60 minutes after the analyzer is turned on, with Alignment running. A user calibration is required before corrected measurements can be made.

Frequency

Frequency range¹

N8972A	10 MHz to 1.5 GHz
N8973A	10 MHz to 3.0 GHz
N8974A	10 MHz to 6.7 GHz
N8975A	10 MHz to 26.5 GHz

Measurement bandwidth (nominal)

N8972A	4 MHz
N8973A, N8974A, N8975A	4 MHz, 2 MHz, 1 MHz, 400 kHz, 200 kHz, 100 kHz

Frequency reference

	Standard²	Opt.1D5³
Aging	$\pm < 2 \text{ ppm}^4/\text{year}$	$\pm < 0.1 \text{ ppm}/\text{year}$
Temperature stability	$\pm < 6 \text{ ppm}$	$\pm < 0.01 \text{ ppm}$
Settability	$\pm < 0.5 \text{ ppm}$	$\pm < 0.01 \text{ ppm}$

Tuning Accuracy⁵ (Start, Stop, Center, Marker)

4MHz measurement Bandwidth (default on all models of Noise Figure analyzer)

Frequency	Error
10MHz – 3.0 GHz	$\pm < \text{Reference error} + 100 \text{ kHz}$
3.0GHz – 26.5 GHz	$\pm < \text{Reference error} + 400 \text{ kHz}$

<4 MHz- Measurement Bandwidth (functionality not present in N8972A)

Frequency	Error
10MHz – 3.0 GHz	$< \pm \text{Reference error} + 20 \text{ kHz}$
3.0GHz – 26.5 GHz	$< \pm \text{Reference error} + 20\% \text{ of measurement bandwidth}$

1. The N8974A and N8975A models have a mechanical switch fitted. This switch allows the analyzers to change between the 10 MHz to 3.0GHz and the 3.0 GHz to 6.7 GHz frequency range on the N8974A. On the N8975A, the switch allows the change between the 10 MHz to 3.0 GHz and the 3.0GHz to 26.5 GHz frequency range. If the current measurement frequency range crosses the 3.0GHz point, the switch will operate. The mechanical switch has a limited number of cycles over which it is reliable. To maximize the reliable life of the switch, switching over the 3.0GHz frequency point should be kept to a minimum.

2. Temperature stability on the standard frequency reference is achieved 60 minutes after the analyzer is turned on.

3. Option 1D5 recommended for applications requiring high frequency stability.

4. Parts Per Million (10^{-6}).

5. Tuning accuracy is dependent on measurement bandwidth.

Noise figure and gain

Performance is dependent on the ENR¹ of the noise source used:

N8972A		Noise source ENR		
		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.1 dB	± < 0.1 dB	± < 0.15 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		

N8973A, N8974A and N8975A		Noise source ENR		
(10 MHz to 3.0 GHz)		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.05 dB	± < 0.05 dB	± < 0.1 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		


N8974A and N8975A		Noise source ENR		
(>3.0 GHz)		4-7 dB	12-17 dB	20-22 dB
Noise figure	Measurement range	0 to 20 dB	0 to 30 dB	0 to 35 dB
	Instrument uncertainty	± < 0.15 dB	± < 0.15 dB	± < 0.2 dB
Gain²	Measurement range	-20 to +40 dB		
	Instrument uncertainty	± < 0.17 dB		

Instrument's noise figure


	10 MHz to < 500 MHz	500 MHz to < 2.3 GHz	2.3 GHz to 3 GHz	> 3 GHz to 13.2 GHz	13.2 GHz to 26.5 GHz
Noise figure	< 4.9 dB + (0.0025 * freq in MHz)	< 7.4 dB + (0.00135 * freq in MHz)	< 4.4 dB + (0.0015 * freq in MHz)	< 12 dB	< 16 dB
Noise figure over a limited temperature range of 23° C ± 3° C	< 4.4 dB + (0.0025 * freq in MHz)	< 5.9 dB + (0.00135 * freq in MHz)	< 2.9 dB + (0.0015 * freq in MHz)	< 10.5 dB	< 12.5 dB

1. Excess Noise Ratio
 2. For measurement bandwidths below 4 MHz, and spacing between measurement points below 3 MHz, gain uncertainty may increase to a maximum of ± 0.7 dB.

Characteristic¹ noise figure at 23° C ±3° C (10 MHz to 3.0 GHz)

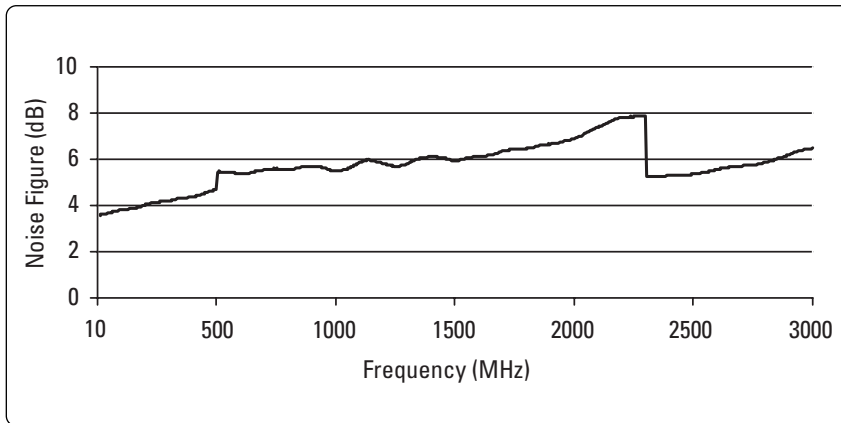

Characteristic¹ noise figure at 23° C ±3° C (3.0 GHz to 26.5 GHz)

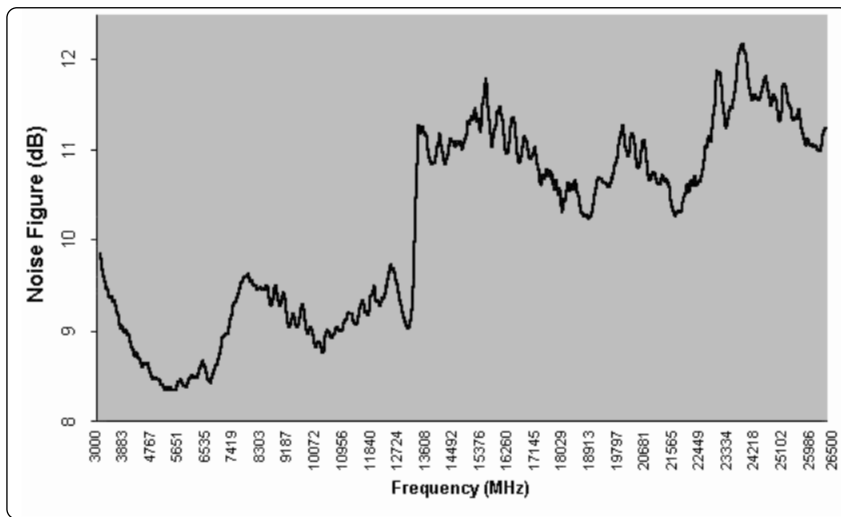

Maximum external gain between noise source output and RF input²
 > 65 dB

Averaging
 Up to 999 measurement results

Jitter³
 Jitter with no averaging⁴ 5 dB Y-factor standard deviation < 0.1 dB

1. Characteristic values are met or bettered by 90% of instruments with 90% confidence.
 2. Subject to maximum operating input power.
 3. Specified for a 4 MHz measurement bandwidth. Jitter in noise figure is equivalent to jitter in Y-factor to within 10% for ENR>14dB and F<4dB. At minimum smoothing, jitter can limit accuracy; the small jitter at high smoothing does not.
 4. For true Gaussian noise, jitter reduces with increased averaging typically by a factor of 1/√(number of averages)

RF input

Connector


N8972A, N8973A N female, 50 Ω nominal

N8974A, N8975A APC 3.5 (m), 50 Ω nominal (ESD sensitive)

SWR (50 Ω reference)


	10 MHz to 500 MHz	500 MHz to 1 GHz	1 GHz to 1.5 GHz	1.5 GHz to 3 GHz	3 GHz to 6.7 GHz	6.7 GHz to 20 GHz	20 GHz to 26.5 GHz
SWR	< 1.6:1	< 1.8:1	< 1.9:1	< 1.8:1	< 1.3:1	< 2.1:1	< 2.4:1

Characteristic¹ SWR at 23° C \pm 3° C (10 MHz to 3.0 GHz)

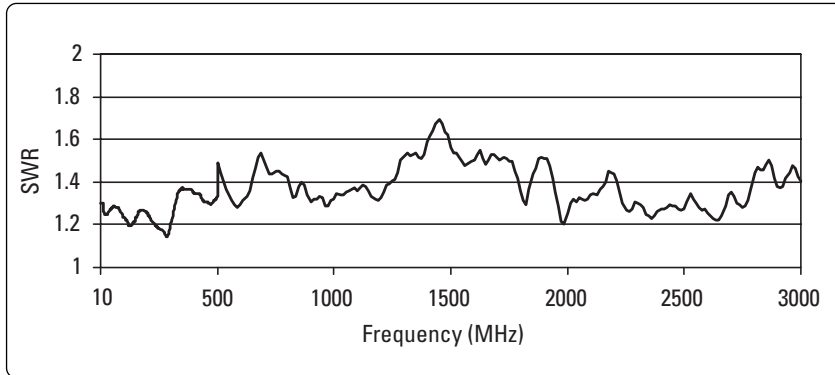

1. Characteristic values are met or bettered by 90% of instruments with 90% confidence.

Characteristic¹ SWR at 23° C ±3° C (3.0 Ghz to 26.5 Ghz)

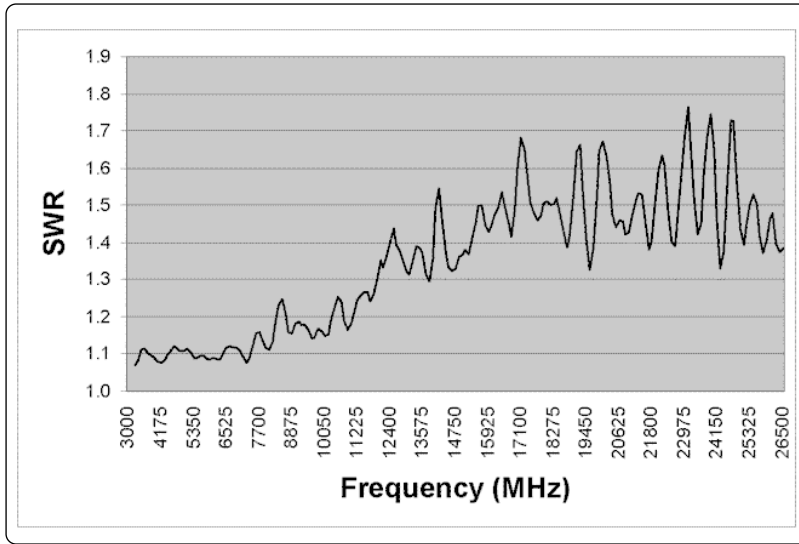

Maximum operating input power²
-10 dBm

Maximum protected input level
±20 Vdc; +15 dBm peak (or average) at RF

1. Characteristic values are met or bettered by 90% of instruments with 90% confidence.
2. This is the total wide-band noise power. Contributing factors are: Noise source ENR, external gain, noise figure and bandwidth (including DUT).

Measurement

Sweep		
Number of points	2 to 401, or fixed frequency	
Setting	Start/Stop, Center/Span, Frequency list of up to 401 points	
Sweep trigger	Continuous or Single	
Measurement speed (nominal)		
	8 averages	64 averages
N8972A (10 MHz to 1.5 GHz)	<100 ms/measurement	<80 ms/measurement
N8973A (10 MHz to 3.0 GHz)	<50 ms/measurement	<42 ms/measurement
	8 averages	64 averages
N8974A (10 MHz to 3.0 GHz)	< 50 ms/measurement	<42 ms/measurement
N8974A (3.0 GHz to 6.7 GHz)	< 70 ms/measurement	<50 ms/measurement
N8975A (10 MHz to 3.0 GHz)	< 50 ms/measurement	<42 ms/measurement
N8975A (3.0 GHz to 26.5 GHz)	< 70 ms/measurement	<50 ms/measurement
Modes		
Amplifier		
Downconverter in DUT	With fixed or variable IF. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector	
Upconverter in DUT	With fixed or variable IF. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector	
System downconverter	Allows the use of an external downconverting mixer as part of the measurement system. Instrument capable of controlling an external LO via dedicated 'LO GPIB' connector	
Loss compensation	Table of values vs. frequency for losses between noise source and DUT, and between DUT and analyzer	
SNS Series noise source	ENR tables automatic upload. Continuous upload of T_{cold}	

-
1. Corrected Noise Figure and Gain measured on a 3dB pad with a repetitive sweep of 101 points from 600 MHz to 1.0 GHz with a 4 MHz measurement bandwidth.
 2. Corrected Noise Figure and Gain measured on a 3dB pad with a repetitive sweep of 101 points from 4.0 GHz to 6 GHz with a 4 MHz measurement bandwidth.

Display

Type	17cm color LCD panel
Output format	Graphical, table of values, or meter mode
Display channels	2
Number of markers	4 per display channel
Limit lines	Upper and lower for each of 2 channels
Display units	
Noise figure	Noise figure (F dB), or as a ratio (F)
Gain	Gain (G dB), or as a ratio (G)
Y-factor	Y-factor (Y dB) or as a ratio (Y)
Effective noise temperature	Effective input noise temperature in Kelvin, °C, °F
P _{hot}	Relative power density in dB or as a ratio
P _{cold}	Relative power density in dB or as a ratio

Connectivity

GPIB	IEEE-488 bus connector
LO GPIB	IEEE-488 bus connector dedicated to local oscillator control (SCPI or custom command set)
Serial	RS-232, 9-pin D-Sub male
Printer	25-pin parallel D-Sub female, for connection with IEEE 1284 cable to a PCL3 or PCL5 compatible printer
VGA output	15-pin mini D-Sub female ¹
Probe power (nominal)	+15 Vdc, -12.6 Vdc at 150 mA max.
10 MHz Ref out	50 Ω nominal BNC (f), >0 dBm
10 MHz Ref in	50 Ω nominal BNC (f), -15 to +10 dBm
BNC Noise source drive output	
Connector type	50 Ω -type BNC (f)
Output voltage	On: 28.0 V \pm 0.1 V at up to 60mA peak Off: <1 V
SNS Noise source connector	For use with Agilent Technologies' SNS Series noise sources

1. 31.5 kHz horizontal, 60 Hz vertical sync rates, non-interlaced, analog RGB 640 x 480

General specifications

Data storage (nominal)	
Internal drive	30 traces, states or ENR tables
Floppy disk	30 traces, states or ENR tables
Power requirements	
On (line 1)	90 to 132 V rms, 47 to 440 Hz 195 to 250 V rms, 47 to 66 Hz Power consumption < 300 W
Standby (line 0)	< 5 W
Dimensions	
Without handle	222mm(H) x 410mm(D) x 375mm(W)
With handle (max)	222mm(H) x 515mm(D) x 409mm(W)
Weight (typical, without options)	
N8972A	15.3 kg (33.7 lbs.)
N8973A	15.5 kg (34.2 lbs.)
N8974A	17.5 kg (38.61 lbs.)
N8975A	17.5 kg (38.61 lbs.)
Audible noise	
< 42 dBa pressure and < 5.0 bels power (ISODP7779)	
Temperature range	
Operating	0° C to +55° C
Storage	-40° C to +70° C
Humidity range	
Operating	Up to 95% relative humidity to 40° C (non-condensing)
Altitude range	
Operating	to 4,600 meters
Calibration interval	
1-year minimum recommended	

Electromagnetic Compatibility

This product conforms with the protection requirements of European Council Directive 89/336/EEC for Electromagnetic Compatibility (EMC).

The conformity assessment requirements have been met using the technical Construction file route to compliance, using EMC test specifications EN 55011:1991 (Group 1, Class A) and EN 50082-1:1992.

In order to preserve the EMC performance of the product, any cable which becomes worn or damaged must be replaced with the same type and specification.

Radio-Frequency Electromagnetic Field Immunity

When a 3 Vm-1 radio-frequency electromagnetic field is applied to the noise figure analyzer according to IEC 61000-4-3:1995, degradation of performance may be observed. When the frequency of the incident field matches the frequency of a measured noise figure or gain, the values displayed will deviate from those expected. This phenomenon will only affect that specific frequency, and the analyzer will continue to perform to specification at all other frequency sample points.

The noise figure analyzer may be unable to calibrate a chosen frequency sample point, if the frequency matches that of an incident electromagnetic field. ¹

1. Radiated Immunity Testing. When tested at 3 V/m, according to IEC 801-3/1984, the displayed average noise level will be within specifications over the full immunity test frequency range of 27 MHz to 500 MHz except at the immunity test frequencies of 223.5714 MHz +/- selected resolution bandwidth, and 437.1429 MHz +/- selected resolution bandwidth, where the displayed average noise level can be up to -45 dBm. When the noise figure analyzer tuned frequency is identical to these immunity test frequencies, the measurements could be corrupted and there may be signals of up to -70 dBm displayed on the screen.

For further information

Key literature:

Please visit the Agilent noise figure analysis web site for on-line access to literature or contact your local Agilent sales office or representative.

Noise Figure Analyzers - NFA Series - Brochure,
literature number 5980-0166E

Noise Figure Analyzers - NFA Series - Configuration Guide,
literature number 5980-0163E

Fundamentals of RF and Microwave Noise Figure Measurements,
Application Note 57-1, literature number 5952-8255E

Noise Figure Measurement Accuracy, *Application Note 57-2*,
literature number 5952-3706E

10 Hints for Making Successful Noise Figure Measurements;
Application Note 57-3, literature number 5980-0288E

Key web resources:

For the latest information on our noise figure solutions, see our web page at:

www.agilent.com/find/nf

For the latest news on the component test industry, see our web page at:

www.agilent.com/find/component_test

For the latest news in the aerospace industry, see our web page at:

www.agilent.com/find/aerospace

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contacting us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By Internet, phone, or fax, get assistance with all your test and measurement needs

Online assistance:
www.agilent.com/find/assist

**Phone or Fax
United States:**
(tel) 1 800 452 4844

Canada:
(tel) 1 877 894 4414
(fax) (905) 206 4120

Europe:
(tel) (31 20) 547 2000

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia:
(tel) 1 800 629 485
(fax) (61 3) 9272 0749

New Zealand:
(tel) 0 800 738 378
(fax) 64 4 495 8950

Asia Pacific:
(tel) (852) 3197 7777
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2001 Agilent Technologies
Printed in USA August 28, 2001
5980-0164E



Agilent Technologies